

(19)



Europäisches Patentamt

European Patent Office

Office européen des brevets



(11)

EP 0 823 804 A2

(12)

EUROPEAN PATENT APPLICATION

(43) Date of publication:

11.02.1998 Bulletin 1998/07

(51) Int Cl.⁶ H04L 27/26

(21) Application number: 97305936.3

(22) Date of filing: 05.08.1997

(84) Designated Contracting States:

AT BE CH DE DK ES FI FR GB GR IE IT LI LU MC
NL PT SE

(30) Priority: 06.08.1996 JP 207382/96

(71) Applicant: MITSUBISHI DENKI KABUSHIKI

KAISHA

Tokyo 100 (JP)

(72) Inventors:

• Tsujishita, Masahiro

Chiyoda-ku, Tokyo 100 (JP)

• Taura, Kenichi

Chiyoda-ku, Tokyo 100 (JP)

• Ohkubo, Tadatoshi

Chiyoda-ku, Tokyo 100 (JP)

• Ohsuga, Yoshiharu

Chiyoda-ku, Tokyo 100 (JP)

(74) Representative: Burke, Steven David et al

R.G.C. Jenkins & Co.

26 Caxton Street


London SW1H 0RJ (GB)

(54) Carrier offset correction in a multicarrier modulation system

(57) A digital receiver uses a local oscillator to down-convert an orthogonal frequency-division multiplexed signal that has been modulated by differential phase-shift keying, and performs further processing to obtain a differentially demodulated array of phase values. According to a first aspect of the invention, the digital receiver detects a carrier offset, applies a corresponding phase correction to the values in the array,

then shifts the entire array by an amount corresponding to the carrier offset. As a result, the local oscillator need be tuned only in a frequency range equal to the subcarrier spacing. According to a second aspect of the invention, the local oscillator is tuned within a range equal to the subcarrier spacing multiplied by a certain integer, the array is shifted by a multiple of this integer, and the phase correction is eliminated.

FIG. 1

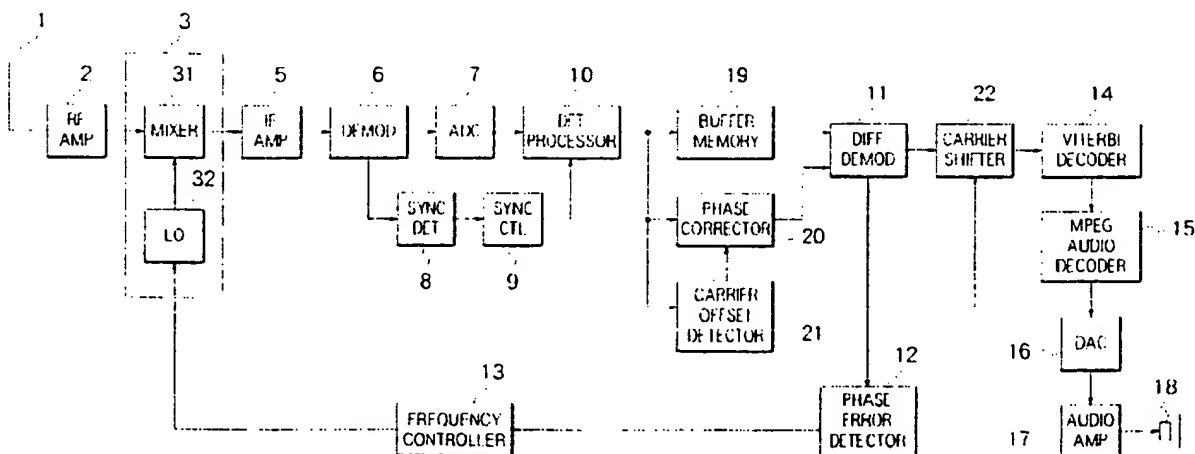

EP 0 823 804 A2

Description

BACKGROUND OF THE INVENTION

5 The present invention relates to a method of receiving a signal transmitted by orthogonal frequency-division multiplexing (OFDM), in which the multiplexed subcarrier signals are modulated by differential phase-shift keying, and to a digital receiver employing this method.

OFDM is particularly advantageous for broadcasting signals to mobile receivers, which must contend with such problems as multipath fading. Recommendation BS.774, drafted by the Radiotelecommunication Standardization Sector of the International Telecommunication Union (ITU-R), proposes a digital audio broadcasting standard, referred to below as DAB, in which OFDM is employed with differential phase-shift keying.

10 The DAB subcarrier signals are separated from one another by a constant frequency spacing, the modulated subcarriers being positioned above and below a central subcarrier which is not modulated. A conventional receiver down-converts the received signal by mixing it with the output of a local oscillator tuned in a precise frequency relationship to the central subcarrier, performs a complex Fourier transform to obtain phase information for each modulated subcarrier, then performs differential demodulation and further decoding to obtain the broadcast audio data.

15 A problem with this receiving method is that the local oscillator must be tunable over a comparatively wide frequency range. Local oscillators with wide tuning ranges are costly, and are also difficult to tune accurately. The conventional receiving method therefore leads to an expensive receiver with undesirable tuning error.

20 A simple solution to this problem would be to use a less expensive and more accurate local oscillator having a narrower tuning range, and tune the local oscillator in relation to any one of the subcarriers. If the local oscillator is not tuned in relation to the central subcarrier, the array of differentially demodulated subcarrier data will be offset by a certain number of subcarriers, but the elements in the array can be shifted in the opposite direction by the same number of subcarriers to compensate for the offset. Unfortunately, the data symbols in the DAB signal are separated by guard intervals, to prevent inter-symbol interference, and these guard intervals produce a type of error that cannot be corrected by a simple array shift. Details will be given later.

SUMMARY OF THE INVENTION

30 An object of the present invention is to enable a digital receiver to receive a differentially modulated OFDM signal having guard intervals, without requiring a local oscillator that can be tuned over a wide frequency range.

The invented digital receiver is a receiver of the type having a local oscillator and mixer for down-converting an OFDM signal, a processor that obtains a first array of values containing phase information of each subcarrier in the OFDM signal, a buffer memory that obtains a second array by storing and thereby delaying the first array, and a differential demodulator that obtains a differentially demodulated array representing phase differences between the first array and the second array.

35 According to a first aspect of the invention, the digital receiver also has a carrier offset detector that detects a carrier offset equal to an integer multiple of the subcarrier frequency spacing, a phase corrector that applies a phase correction calculated from the carrier offset, and a carrier shifter that shifts the differentially demodulated array according to the carrier offset.

40 If the OFDM signal has valid symbol intervals of a duration t_s and guard intervals of a duration t_G , and if the carrier offset is m times the subcarrier frequency spacing, the phase correction preferably has a magnitude of:

$$2 \times \pi \times m \times t_G / t_s$$

45 The phase correction may be applied to the first array, or to the second array, or to the differentially demodulated array.

The digital receiver preferably also has a phase error detector that detects phase error in the differentially demodulated array, and a frequency controller that tunes the local oscillator in a direction that reduces the phase error.

50 Due to the phase correction and carrier shift performed in the first aspect of the invention, accurately demodulated data can be obtained by tuning the local oscillator within a frequency range equal to the subcarrier frequency spacing.

According to a second aspect of the invention, the digital receiver has a carrier offset detector, a frequency controller, and a carrier shifter, but no phase corrector. The frequency controller adjusts the frequency of the local oscillator by an amount that makes the carrier offset a multiple of the integer a closest to t_s/t_G , obviating the need for a phase correction.

55 The frequency controller preferably also adjusts the frequency of the local oscillator according to a phase error detected as in the first aspect of the invention, thereby reducing the phase error.

Due to the carrier shift performed in the second aspect of the invention, accurately demodulated data can be obtained by tuning the local oscillator within a frequency range equal to the subcarrier frequency spacing multiplied by α .

BRIEF DESCRIPTION OF THE DRAWINGS

In the attached drawings:

FIG. 1 is a block diagram of a first embodiment of the invention;

FIG. 2 illustrates the format of a DAB frame;

FIG. 3 illustrates the carrier-shifting operation of the first embodiment;

FIG. 4 is a block diagram of a second embodiment of the invention;

FIG. 5 is a block diagram of a third embodiment of the invention; and

FIG. 6 is a block diagram of a fourth embodiment of the invention.

DETAILED DESCRIPTION OF THE INVENTION

Embodiments of the invention will be described with reference to the attached illustrative drawings.

Referring to FIG. 1, the first embodiment is a digital receiver having an antenna 1, a radio-frequency amplifier (RF AMP) 2, a frequency converter 3 comprising a mixer (MIX) 31 and local oscillator (LO) 32, an intermediate-frequency amplifier (IF AMP) 5, an orthogonal demodulator (DEMODO) 6, an analog-to-digital converter (ADC) 7, a synchronization detector (SYNC DET) 8, a synchronization controller (SYNC CTL) 9, a discrete Fourier transform (DFT) processor 10, a differential demodulator (DIFF DEMODO) 11, a phase error detector 12, a frequency controller 13, a Viterbi decoder 14, an MPEG audio decoder 15, a digital-to-analog converter (DAC) 16, an audio amplifier 17, a loudspeaker 18, and a buffer memory 19. These elements are also found in conventional digital receivers. The local oscillator 32 is a voltage-controlled oscillator.

The novel elements in the first embodiment are a phase corrector 20, a carrier offset detector 21, and a carrier shifter 22. These elements are digital circuits that perform arithmetic and logic operations. Detailed circuit descriptions will be omitted to avoid obscuring the invention with unnecessary detail.

Incidentally, Viterbi decoding is a well-known type of maximum-likelihood decoding, and MPEG audio coding is a coding system recommended by the Motion Picture Experts Group (MPEG) and International Standards Organization (ISO).

The first embodiment is designed to receive a signal such as a DAB signal having the format shown in FIG. 2. The signal is divided into frames, each comprising two reference symbols followed by a fixed number of data symbols. The first reference symbol is a null symbol having zero amplitude, used for frame synchronization. The second reference symbol is a phase-reference symbol. Each data symbol comprises a guard interval of duration t_g and a valid symbol interval of duration t_s .

Frames of the type shown in FIG. 2 are transmitted simultaneously on K subcarrier signals, each modulated by differential quadrature phase-shift keying (DQPSK). K is an integer greater than one; in DAB mode one, for example, K is one thousand five hundred thirty-six (1536). The subcarrier signal frequencies are separated from one another by a subcarrier frequency spacing Δf_c equal to the reciprocal of the valid symbol interval t_s .

The subcarriers are conventionally numbered in order of frequency from $-K/2$ to $K/2$. The central or zero-th subcarrier is not modulated.

The data transmitted in these frames are compressed audio data, encoded according to Layer Two of the MPEG-1 standard. The DAB recommendation establishes a specific order in which the coded audio data are assigned to the K subcarriers. For protection against transmission errors, the data are also convolutionally coded, and the convolutionally coded values are interleaved over a certain number of symbols.

Next, the operation of the first embodiment will be described.

Referring again to FIG. 1, the signal received at the antenna 1 is amplified by the radio-frequency amplifier 2 and down-converted in the mixer 31, by multiplication with the output of the local oscillator 32. Down-conversion produces an intermediate-frequency (IF) signal with frequency components equal to the difference between the frequency components present in the received signal and the frequency of the local oscillator 32.

The intermediate-frequency amplifier 5 amplifies the intermediate-frequency signal and rejects unwanted signal components such as adjacent-channel interference components. The resulting amplified intermediate-frequency signal is demodulated by an orthogonal demodulator 6, thereby being further down-shifted to a baseband frequency. The baseband signal is a complex-valued signal with an in-phase (I) component and a quadrature (Q) component.

The baseband signal is sampled and digitized by the analog-to-digital converter 7, then provided to the DFT processor 10, which performs a complex discrete Fourier transform on each symbol.

The baseband signal is also provided in analog form to the synchronization detector 8, which detects the envelope

of the baseband signal. The synchronization detector 8 thereby detects the null symbol at the beginning of each frame. Based on the timing of the null symbol as reported by the synchronization detector 8, the synchronization controller 9 supplies the DFT processor 10 with timing signals that synchronize the DFT process with the symbols in each frame, establishing a window for the discrete Fourier transform performed on each symbol.

The discrete Fourier transform performed in the DFT processor 10 produces an array of, for example, two thousand forty-eight (2048) complex values representing the magnitude and phase of the baseband signal at an evenly-spaced set of frequencies, separated from one another by the subcarrier frequency spacing Δf_c . The number of complex values in the array does not have to be two thousand forty-eight, but must exceed the number K of subcarriers by an amount sufficient to allow for anticipated differences in local-oscillator frequency between the transmitter (not shown) and receiver.

The array is stored in the buffer memory 19 for one symbol interval, then supplied to the differential demodulator 11. The array is also supplied to the phase corrector 20 and carrier offset detector 21. The carrier offset detector 21 detects a carrier offset, and the phase corrector 20 applies a corresponding phase correction, details of which will be described later.

The differential demodulator 11 takes the differences between the corrected phase values of the current array, which are obtained from the phase corrector 20, and the uncorrected phase values of the preceding array, which are read from the buffer memory 19. Due to the DQPSK modulation scheme employed in the DAB signal, if the frequency of the IF signal furnished to the orthogonal demodulator 6 is correct, at the subcarrier frequencies of the DAB signal, each phase difference will have one of the four values $\pi/4$, $3\pi/4$, $5\pi/4$, and $7\pi/4$.

The phase error detector 12 multiplies the phase differences by four, divides the results by 2π , and takes the remainder. At DAB subcarrier frequencies, the remainder should always be equal to π ; any deviation from π represents a phase error. The phase error detector 12 averages the difference between a certain number of these remainders and π to obtain a differential phase error E . If the frequency error ζ of the baseband signal is sufficiently small, it is related to the differential phase error E by the following equation, in which T_{sym} is the duration of one symbol, including the guard interval.

$$\zeta = E / T_{\text{sym}}$$

The frequency controller 13 tunes the local oscillator 32 in a direction that reduces the differential phase error E , thereby bringing E to zero and holding E substantially equal to zero. The size of the tuning adjustment can be calculated from the equation above. This tuning operation does not necessarily reduce the baseband frequency error ζ to zero, but brings ζ to an integer multiple of the subcarrier frequency spacing, so that for some integer m ,

$$\zeta = m \Delta f_c$$

The integer m is the carrier offset detected by the carrier offset detector 21.

Once the differential phase error E has been corrected by the frequency controller 13, the array of values output by the differential demodulator 11 will contain correct data for the K subcarriers of the DAB signal. If the local oscillator 32 is correctly tuned in relation to the central subcarrier, the K subcarrier data values will occupy the central part of the array. If the local oscillator 32 is tuned to a different frequency, the positions of the subcarrier data will be shifted up or down in the array. This shift is also the carrier offset m detected by the carrier offset detector 21.

At the direction of the carrier offset detector 21, the carrier shifter 22 selects the K subcarrier data values from the array output by the differential demodulator 11. In effect, the carrier shifter 22 shifts the array by m positions to compensate for the carrier offset, then takes the K subcarrier data values from their normal positions in the shifted array.

The carrier shifting operation is illustrated in FIG. 3. The solid arrows in FIG. 3 represent complex data in the differentially demodulated array. The numbers $\dots, n, n+1, \dots, n+7, \dots$ correspond to array subscripts, and m is the carrier offset detected by the carrier offset detector 21. By shifting the data by m positions as indicated by the dotted arrows, the carrier shifter 22 compensates for the carrier offset. FIG. 3 illustrates a case in which the carrier offset is equivalent to twice the subcarrier frequency spacing, so the carrier shift is by two positions in the array.

As a result of this carrier shift, the carrier shifter 22 is able to furnish the Viterbi decoder 14 with K correctly arranged data values. The Viterbi decoder 14 de-interleaves and convolutionally decodes the data, thereby correcting data errors that may have occurred in transmission. The MPEG audio decoder 15 decodes the output of the Viterbi decoder 14 according to MPEG-1 decoding rules (Layer Two), thereby expanding the output of the Viterbi decoder 14 into a digital audio signal. The digital-to-analog converter 16 converts this signal to an analog signal, which is amplified by the audio amplifier 17 and reproduced through the loudspeaker 18.

Next, the operation of the phase corrector 20 and subcarrier offset detector 21 will be described in more detail.

The carrier offset detector 21 detects the carrier offset from the phase reference symbol. In the phase reference symbol, the k-th subcarrier is modulated to represent a fixed complex value z_k equal to one of four values $\exp(jn\pi/2)$ (where j is the square root of minus one and $n = 0, 1, 2, \text{ or } 3$). The signal waveform $s(t)$ of the phase reference symbol can be represented by the following equation, in which w is a fixed angular frequency, and t is a time variable.

$$s(t) = \sum_{k=-K/2}^{K/2} z_k b(t) e^{2jk\omega t}$$

$$b(t) = \begin{cases} 1 & 0 < t < t_s \\ 0 & \text{otherwise} \end{cases}$$

An array of complex conjugate values z_k^* of the phase reference values z_k ($k = -K/2$ to $K/2$) is stored in the subcarrier offset detector 21, and is correlated with the array output by the DFT processor 10 under various assumed carrier offsets m . If the array output by the DFT processor 10 has values $Z_{1,k}$, the carrier offset detector 21 calculates products of the form $Z_{1,k} z_k^*$, the correlation being the sum of these products as k ranges from $-K/2$ to $K/2$. The integer m that yields the greatest correlation is detected as the carrier offset, and indicates the multiple of the subcarrier frequency spacing that is nearest to the actual frequency error ζ of the baseband signal.

The phase corrector 20 rotates the values output by the DFT processor 10 through a phase angle Q_3 given by the following equation, in which m is the detected carrier offset, and t_G and t_S are the widths of the guard interval and valid symbol interval as shown in FIG. 2.

$$Q_3 = -2 \times \pi \times m \times t_G / t_S$$

More specifically, the phase corrector 20 performs the following operation, where $Re_{i,k}$ and $Im_{i,k}$ are the real and imaginary parts of the output of the DFT processor 10 for the k-th subcarrier in the i-th symbol, and $Re'_{i,k}$ and $Im'_{i,k}$ are the real and imaginary parts as corrected by the phase corrector 20.

$$Re'_{i,k} = Re_{i,k} \cos(Q_3) - Im_{i,k} \sin(Q_3)$$

$$Im'_{i,k} = Re_{i,k} \sin(Q_3) + Im_{i,k} \cos(Q_3)$$

The reason for this phase correction is as follows.

Ideally, the local oscillator 32 is tuned in perfect relation to the central subcarrier frequency ($k = 0$), there is no frequency error and no synchronization error, and no phase correction is necessary. The operation performed by the differential demodulator 11 can then be represented mathematically by the following equation, in which $Z_{0,i,k}$ is the output of the DFT processor 10 for the k-th subcarrier in the i-th symbol, $Q_{i,k}$ is the phase angle in radians of $Z_{0,i,k}$, and $Y_{0,i,k}$ is the output of the differential demodulator 11 for the k-th subcarrier in the i-th symbol.

$$\begin{aligned} Y_{0,i,k} &= Z_{0,i,k} / Z_{0,i-1,k} \\ &= \exp(jQ_{i,k}) / \exp(jQ_{i-1,k}) \end{aligned}$$

In practice, synchronization error in the timing of the DFT window leads to a certain phase error Q_1 , frequency error leads to a further phase error of Q_2 per symbol, and the above phase correction Q_3 is applied. The differential demodulation operation is accordingly altered as in the following equation, in which $Y_{1,i,k}$ and $Z_{1,i,k}$ are the actual (non-ideal) outputs of the differential demodulator 11 and DFT processor 10, but $Q_{i,k}$ still represents the correct (ideal) phase angle.

$$\begin{aligned}
Y1_{i,k} &= Z1_{i,k} / Z1_{i-1,k} \\
&= \exp[j(Q_{i,k} + Q_1 + Q_2 + Q_3)] / \exp[j(Q_{i-1,k} + Q_1)] \\
&= Y0_{i,k} \exp[j(Q_2 + Q_3)]
\end{aligned}$$

The actual differentially demodulated data will have the correct values when $Y1_{i,k}$ is equal to $Y0_{i,k}$; that is, when $\exp[j(Q_2 + Q_3)]$ is equal to unity. This occurs when $Q_2 + Q_3$ is an integer multiple of 2π .

Q_2 can be calculated as follows in terms of the baseband frequency error ζ and symbol interval T_{sym} .

$$Q_2 = 2 \times \pi \times \zeta \times T_{\text{sym}}$$

Since the subcarrier frequency spacing Δf_c is equal to the reciprocal of the valid symbol interval t_s , the symbol interval T_{sym} has the following value.

$$T_{\text{sym}} = 1 / \Delta f_c + t_G$$

When the frequency error ζ is m times the subcarrier frequency spacing Δf_c (m being an integer), Q_2 has the following value.

$$\begin{aligned}
Q_2 &= (2 \times \pi \times m) + (2 \times \pi \times m \times t_G \times \Delta f_c) \\
&= (2 \times \pi \times m) + (2 \times \pi \times m \times t_G / t_s) \\
&= (2 \times \pi \times m) - Q_3
\end{aligned}$$

The following relations are therefore satisfied.

$$Q_2 + Q_3 = (2 \times \pi \times m)$$

$$\exp[j(Q_2 + Q_3)] = 1$$

$$Y1_{i,k} = Y0_{i,k}$$

The last of these relations means that, due to the phase correction Q_3 , the differentially demodulated data have the correct (ideal) values, despite the presence of the carrier offset. The phase correction Q_3 cancels out the excess phase rotation that occurs during the guard interval, which cannot be corrected by the carrier shift.

The frequency control operation performed by the frequency controller 13 will now be reconsidered in terms of the carrier offset. Any baseband frequency error ζ can be expressed as an integer multiple of the subcarrier frequency spacing ($m \Delta f_c$) and a portion ζ' which is less than the subcarrier frequency spacing. The phase error detector 12 detects only ζ' .

$$\zeta'' = \zeta - m \Delta f_c$$

Since an alteration in the frequency of the local oscillator produces an equal alteration in the baseband frequency, the frequency controller 13 needs to tune the local oscillator 32 only within a frequency range equivalent to one subcarrier frequency spacing Δf_c to reduce ζ' to zero. A local oscillator 32 with a tuning range on the order of Δf_c need not be expensive, and its tuning can easily be controlled with a high degree of accuracy.

The first embodiment accordingly obtains correctly demodulated data in a receiver using an inexpensive and ac-

curately tunable local oscillator, despite the presence of a guard interval in the signal being received, without requiring the local oscillator to be tuned to the central subcarrier frequency.

FIG. 4 illustrates a second embodiment of the invention, using the same reference numerals as in FIG. 1. The second embodiment differs from the first embodiment only in the position and operation of the phase corrector 20, which in the second embodiment adjusts the output of the buffer memory 19.

The phase correction Q_4 applied by the phase corrector 20 in the second embodiment is equal in magnitude but opposite in sign to the phase correction Q_3 applied in the first embodiment.

$$Q_4 = -Q_3 = 2 \times \pi \times m \times t_G/t_S$$

The differential demodulation operation in the second embodiment can be described mathematically as follows, where $Y_{2,i,k}$ is the actual output of the differential demodulator 11 and $Y_{0,i,k}$ is, as before, the ideal value.

$$\begin{aligned} Y_{2,i,k} &= \exp[j(Q_{i,k} + Q_1 + Q_2)] / \exp[j(Q_{i-1,k} - Q_1 + Q_4)] \\ &= Y_{0,i,k} \exp[j(Q_2 - Q_4)] \\ &= Y_{0,i,k} \exp[j(Q_2 - Q_3)] \end{aligned}$$

The differentially demodulated output $Y_{2,i,k}$ in the second embodiment is identical to the differentially demodulated output $Y_{1,i,k}$ in the first embodiment. The second embodiment provides the same effects as the first embodiment.

FIG. 5 illustrates a third embodiment of the invention, again using the same reference numerals as in FIG. 1. The third embodiment also differs from the first embodiment only in the position and operation of the phase corrector 20, which is now disposed between the differential demodulator 11 and Viterbi decoder 14, and adjusts the phase values in the differentially demodulated array output by the differential demodulator 11.

The phase correction Q_5 applied by the phase corrector 20 in the third embodiment is identical to the phase correction Q_3 applied in the first embodiment.

$$Q_5 = Q_3 = 2 \times \pi \times m \times t_G/t_S$$

The differential demodulation operation and subsequent phase correction in the third embodiment can be described mathematically as follows, where $Y_{3,i,k}$ is the output of the phase corrector 20.

$$\begin{aligned} Y_{3,i,k} &= \exp(jQ_5) \exp[j(Q_{i,k} + Q_1 + Q_2)] / \exp[j(Q_{i-1,k} + Q_1)] \\ &= Y_{0,i,k} \exp[j(Q_2 - Q_5)] \\ &= Y_{0,i,k} \exp[j(Q_2 - Q_3)] \end{aligned}$$

The values $Y_{3,i,k}$ supplied to the Viterbi decoder 14 in the third embodiment are identical to the values $Y_{1,i,k}$ supplied in the first embodiment. The third embodiment also provides the same effects as the first embodiment.

FIG. 6 illustrates a fourth embodiment of the invention, in which the operation of the frequency controller 13 is altered and the phase corrector is eliminated entirely. The carrier shifter 22 is now controlled by the frequency controller 13, instead of by the carrier offset detector 21. The other elements in the fourth embodiment are the same as in the preceding embodiments.

The phase corrections Q_3 , Q_4 , and Q_5 in the preceding embodiments were equal to $\pm 2 \times \pi \times m \times t_G/t_S$. If $m \times t_G/t_S$ is an integer, the phase correction becomes an integer multiple of 2π , obviating the need for any actual correction. In the fourth embodiment, the frequency controller 13 operates so as to make $m \times t_G/t_S$ an integer.

The fourth embodiment makes use of the fact that the DAB guard interval t_G is substantially equal to one-fourth the reciprocal of the subcarrier frequency spacing Δf_c , or one-fourth the valid symbol interval t_S .

$$\begin{aligned} t_G &\approx 1 / \Delta f_c \times 0.25 \\ &\approx t_S \times 0.25 \end{aligned}$$

It follows that t_G/t_S is substantially equal to one-fourth, so if the carrier offset m is a multiple of four, $m \times t_G/t_S$ will be substantially an integer.

To deal with the general case, given that the valid symbol interval t_S is the reciprocal of the subcarrier frequency spacing Δf_c , let α be the closest integer to t_S/t_G . The phase correction becomes substantially unnecessary when the carrier shift is a multiple of α . For a DAB receiver, α is equal to four.

The local oscillator 32 in the fourth embodiment has a variable frequency range of at least α times the subcarrier frequency spacing. This enables the frequency controller 13 to adjust the local oscillator 32 to a frequency that makes the carrier offset m a multiple of α , as well as eliminating the phase error E detected by the phase error detector 12.

Let V_c be the control voltage applied by the frequency controller 13 to the local oscillator 32, and let V_{min} and V_{max} by the minimum and maximum control voltages that can be applied. Let Dv be the amount by which the control voltage must be changed to alter the frequency of the local oscillator 32 by one subcarrier frequency spacing. The requirements for the tuning range of the local oscillator 32 can be given in terms of these quantities as follows.

$$V_{min} \leq V_c \leq V_{max}$$

$$V_{max} - V_{min} \geq \alpha Dv$$

The carrier offset m detected by the carrier offset detector 21 at the present setting (V_c) can be expressed as the sum of an integer m'' that is a multiple of α , plus another integer m' having an absolute value less than α . The frequency controller 13 calculates m'' and m' by, for example, dividing the detected carrier offset by α , setting m'' equal to the integer part of the quotient, and setting m' equal to the remainder. The carrier offset m will become a multiple of α , and m' will become zero, if the control voltage V_c is changed to the following voltage V_c' .

$$V_c' = V_c + m'Dv$$

If $V_{min} \leq V_c' \leq V_{max}$, the frequency controller 13 changes the control voltage of the local oscillator 32 to the above value V_c' , and instructs the carrier shifter 22c to perform a carrier shift of m'' on subsequent symbols.

If $V_c' > V_{max}$, the frequency controller 13 changes the control voltage of the local oscillator 32 to the following value V_c' , and instructs the carrier shifter 22 to perform a subcarrier shift of $(m'' + \alpha)$ on subsequent symbols.

$$V_c' = V_c + (m' - \alpha)Dv$$

If $V_c' < V_{min}$, the frequency controller 13 changes the control voltage of the local oscillator 32 to the value V_c' given below, and instructs the carrier shifter 22 to perform a subcarrier shift of $(m'' - \alpha)$ on subsequent symbols.

$$V_c' = V_c + (m' + \alpha)Dv$$

In addition, the frequency controller 13 adjusts the control voltage V_c' to make the phase error E detected by the phase error detector 12 equal to zero. This additional tuning adjustment is normally smaller than Dv , but if this adjustment would take the control voltage below V_{min} or above V_{max} , the frequency controller 13 adds or subtracts αDv to keep V_c' between V_{min} and V_{max} , and alters m'' by subtracting or adding α .

In an alternate formulation of the above control rule, the carrier shifts to be performed by the carrier shifter 22 are given in terms of m' and the detected carrier offset m as follows:

($m - m'$), if $V_{min} \leq V_c' \leq V_{max}$

($m - m' + \alpha$), if $V_c' > V_{max}$

($m - m' - \alpha$), if $V_c' < V_{min}$

As a variation of the fourth embodiment, the carrier shifter 22 can be adapted to perform a carrier shift according to the carrier offset m detected by the carrier offset detector 21. Once the control voltage applied to the local oscillator

32 has been adjusted to V_c' , the detected carrier offset m will become a multiple of α , m' will be zero, and correctly demodulated data will be obtained.

When the local oscillator 32 is tunable over a range equal to or greater than $\alpha \Delta f_c$, the fourth embodiment is preferable to the preceding embodiments in that the phase correction process can be eliminated. The fourth embodiment is advantageous when the quantity $\alpha \Delta f_c$ is small enough that a local oscillator with a tuning range of $\alpha \Delta f_c$ can still be inexpensive, and can still be tuned accurately.

Although described above in relation to the DAB recommendation, the present invention is applicable to any orthogonal frequency-division multiplexing that employs differential phase-shift keying, with valid symbol intervals separated by guard intervals.

The subcarrier frequency spacing does not have to be equal to the reciprocal of the valid symbol interval. The subcarrier frequency spacing may be any positive integer multiple of the reciprocal of the valid symbol interval.

The carrier offset detector was described as detecting the carrier offset by correlation of the phase reference symbol, but other methods of detecting the carrier offset can be employed, such as detecting the position of the unmodulated central subcarrier.

Those skilled in the art will recognize that further variations are possible within the scope claimed below.

Claims

1. A digital receiver for receiving an OFDM signal in which a plurality of subcarriers, mutually separated by a certain subcarrier frequency spacing, are modulated by differential phase-shift keying, the digital receiver being of the type that has a local oscillator (32) and mixer (31) for down-converting the OFDM signal, a processor (10) for obtaining a first array containing phase information of each subcarrier in the OFDM signal, a buffer memory (19) for obtaining a second array by storing and thereby delaying the first array, and a differential demodulator (11) for obtaining a differentially demodulated array representing phase differences between the first array and the second array, comprising:

a carrier offset detector (21) for detecting, from said first array, an integer m representing a carrier offset of said first array as a multiple of said subcarrier frequency spacing;

a phase corrector (20) coupled to said carrier offset detector (21), for applying a phase correction calculated from said carrier offset to one array among said first array, said second array, and said differentially demodulated array; and

a carrier shifter (22) coupled to said carrier offset detector (21), for shifting said differentially demodulated array according to said carrier offset and selecting data of said subcarriers from the shifted differentially demodulated array.

2. The digital receiver of claim 1, wherein said OFDM signal has valid symbol intervals of duration t_S , and has guard intervals of duration t_G between consecutive valid symbol intervals, and said phase correction has a magnitude equal to

$$2 \times \pi \times m \times t_G / t_S.$$

3. The digital receiver of claim 1, wherein said phase corrector (20) applies said phase correction to said first array.

4. The digital receiver of claim 1, wherein said phase corrector (20) applies said phase correction to said second array.

5. The digital receiver of claim 1, wherein said phase corrector (20) applies said phase correction to said differentially demodulated array.

6. The digital receiver of claim 1, further comprising:

a phase error detector (12) coupled to said differential demodulator (11), for detecting a phase error of said differentially demodulated array; and

a frequency controller (13) coupled to said phase error detector (12), for tuning said local oscillator (32) according to said phase error.

7. The digital receiver of claim 6, wherein said frequency controller (13) tunes said local oscillator (32) within a fre-

quency range not exceeding said subcarrier frequency spacing.

8. A digital receiver for receiving an OFDM signal in which a plurality of subcarriers, mutually separated by a certain subcarrier frequency spacing, are modulated by differential phase-shift keying, and in which valid symbol intervals having a duration t_S are separated by guard intervals having a duration t_G , the digital receiver being of the type that has a local oscillator (32) and mixer (31) for down-converting the OFDM signal, a processor (10) for obtaining a first array containing phase information of each subcarrier in the OFDM signal, a buffer memory (19) for obtaining a second array by storing and thereby delaying the first array, and a differential demodulator (11) for obtaining a differentially demodulated array representing phase differences between the first array and the second array, comprising:

a carrier offset detector (21) for detecting, from said first array, an integer m representing a carrier offset of said first array as a multiple of said subcarrier frequency spacing;

a frequency controller (13) coupled to said carrier offset detector (21), for tuning said local oscillator (32), thereby making said integer m a multiple of an integer α , α being an integer closest to t_S/t_G ; and

a carrier shifter (22) coupled to said differential demodulator (11), for shifting said differentially demodulated array according to said carrier offset and selecting data of said subcarriers from the shifted differentially demodulated array.

9. The digital receiver of claim 8, further comprising:

a phase error detector (12) coupled to said differential demodulator (11), for detecting a phase error of said differentially demodulated array; wherein

said frequency controller (13) also tunes said local oscillator (32) according to said phase error, thereby reducing said phase error.

10. The digital receiver of claim 8, wherein said frequency controller (13) tunes said local oscillator (32) within a frequency range not exceeding said subcarrier frequency spacing multiplied by said integer α .

11. A method for receiving and processing an OFDM signal having a plurality of subcarriers, mutually separated by a certain subcarrier frequency spacing comprising obtaining a first array containing phase information of each subcarrier in the OFDM signal, obtaining a second array by storing and thereby delaying the first array, and obtaining a differentially demodulated array representing phase differences between the first array and the second array:

detecting, from said first array, an integer m representing a carrier offset of said first array as a multiple of said subcarrier frequency spacing;

applying a phase correction calculated from said carrier offset to one array among said first array, said second array, and said differentially demodulated array; and

shifting said differentially demodulated array according to said carrier offset and selecting data of said subcarriers from the shifted differentially demodulated array.

12. A method for receiving and processing an OFDM signal having a plurality of subcarriers, mutually separated by a certain subcarrier frequency spacing, and in which valid symbol intervals having a duration t_S are separated by guard intervals having a duration t_G , using a digital receiver having a local oscillator, comprising obtaining a first array containing phase information of each subcarrier in the OFDM signal, obtaining a second array by storing and thereby delaying the first array, obtaining a differentially demodulated array representing phase differences between the first array and the second array:

detecting, from said first array, an integer m representing a carrier offset of said first array as a multiple of said subcarrier frequency spacing;

tuning said local oscillator (32), thereby making said integer m a multiple of an integer α , α being an integer closest to t_S/t_G ; and

shifting said differentially demodulated array according to said carrier offset and selecting data of said subcarriers from the shifted differentially demodulated array.

FIG. 1

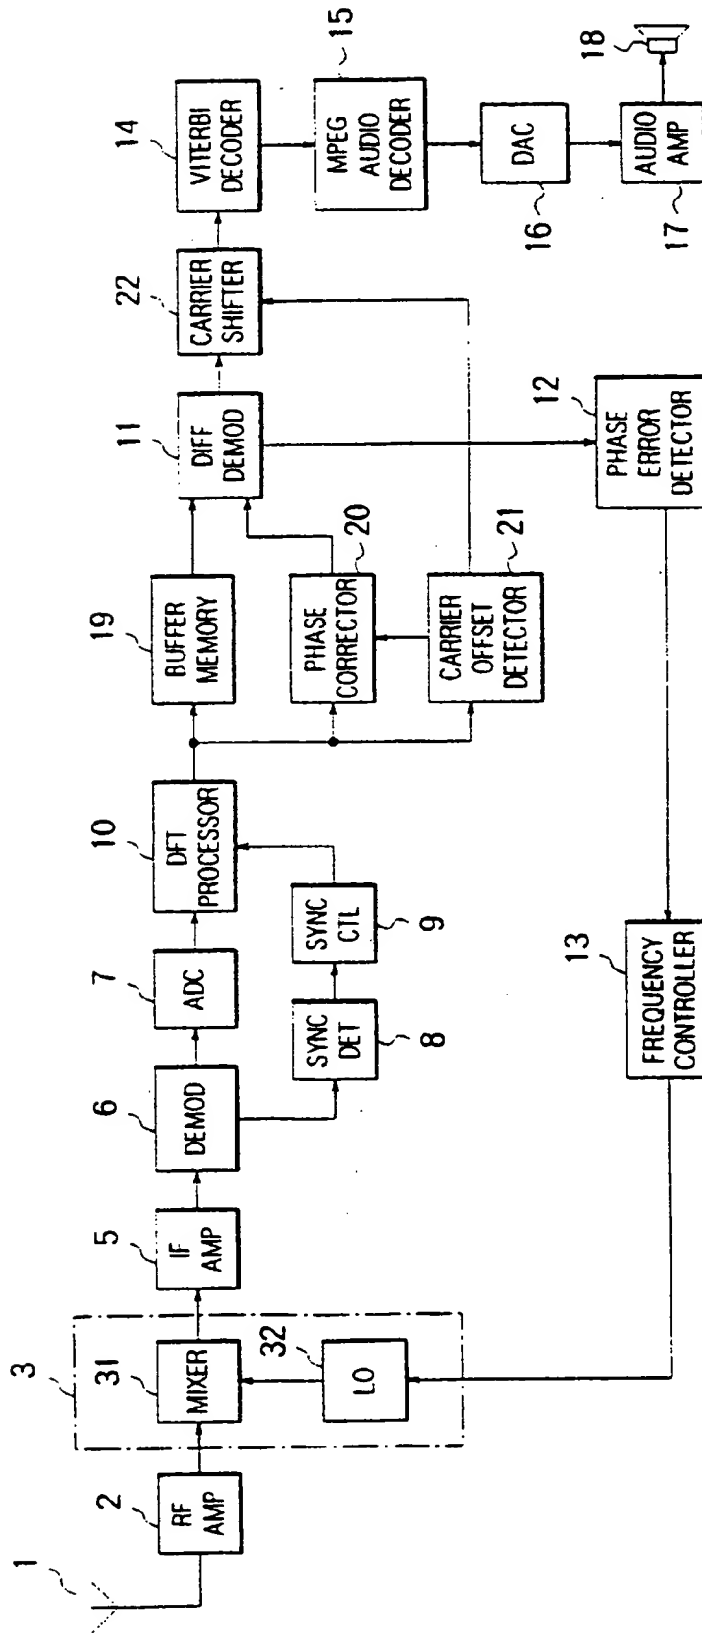


FIG. 2

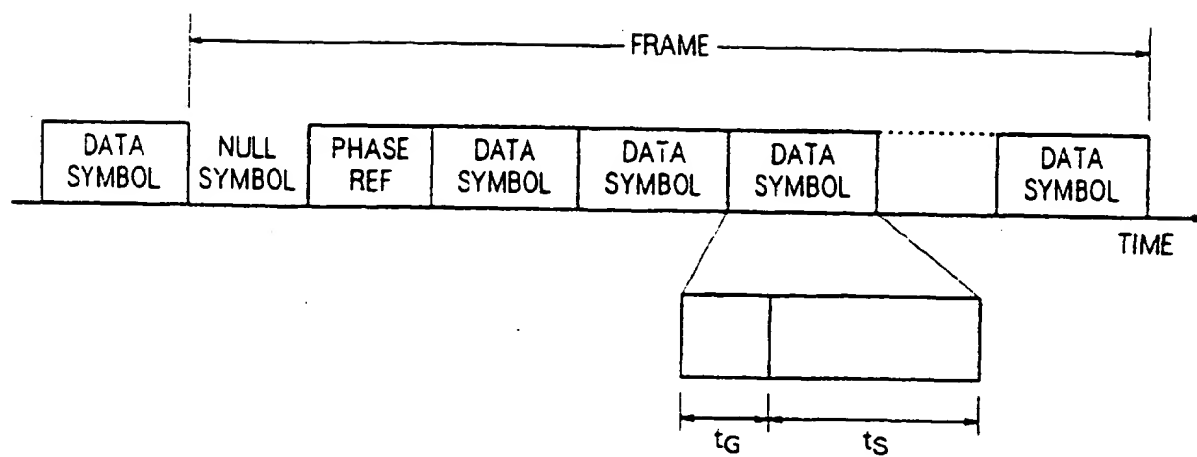


FIG. 3

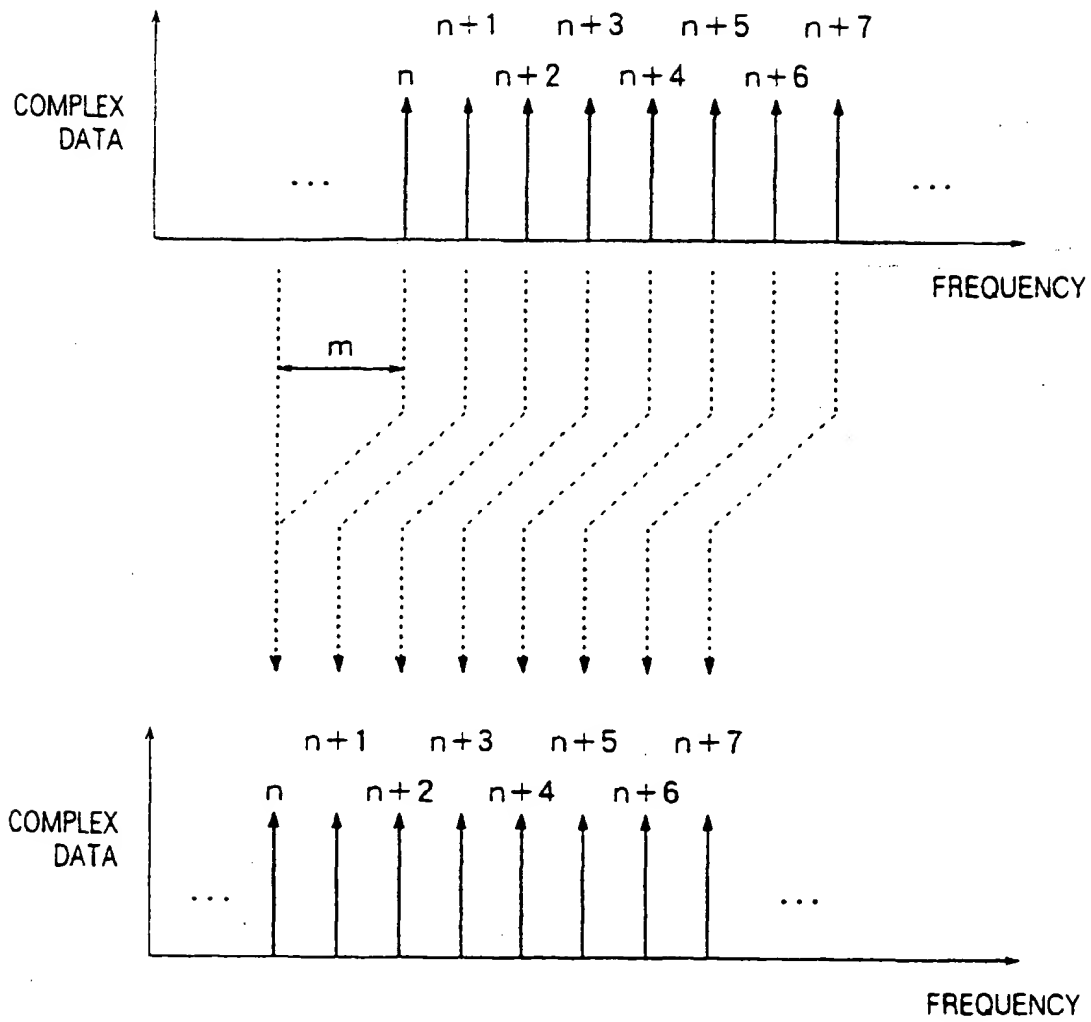


FIG. 4

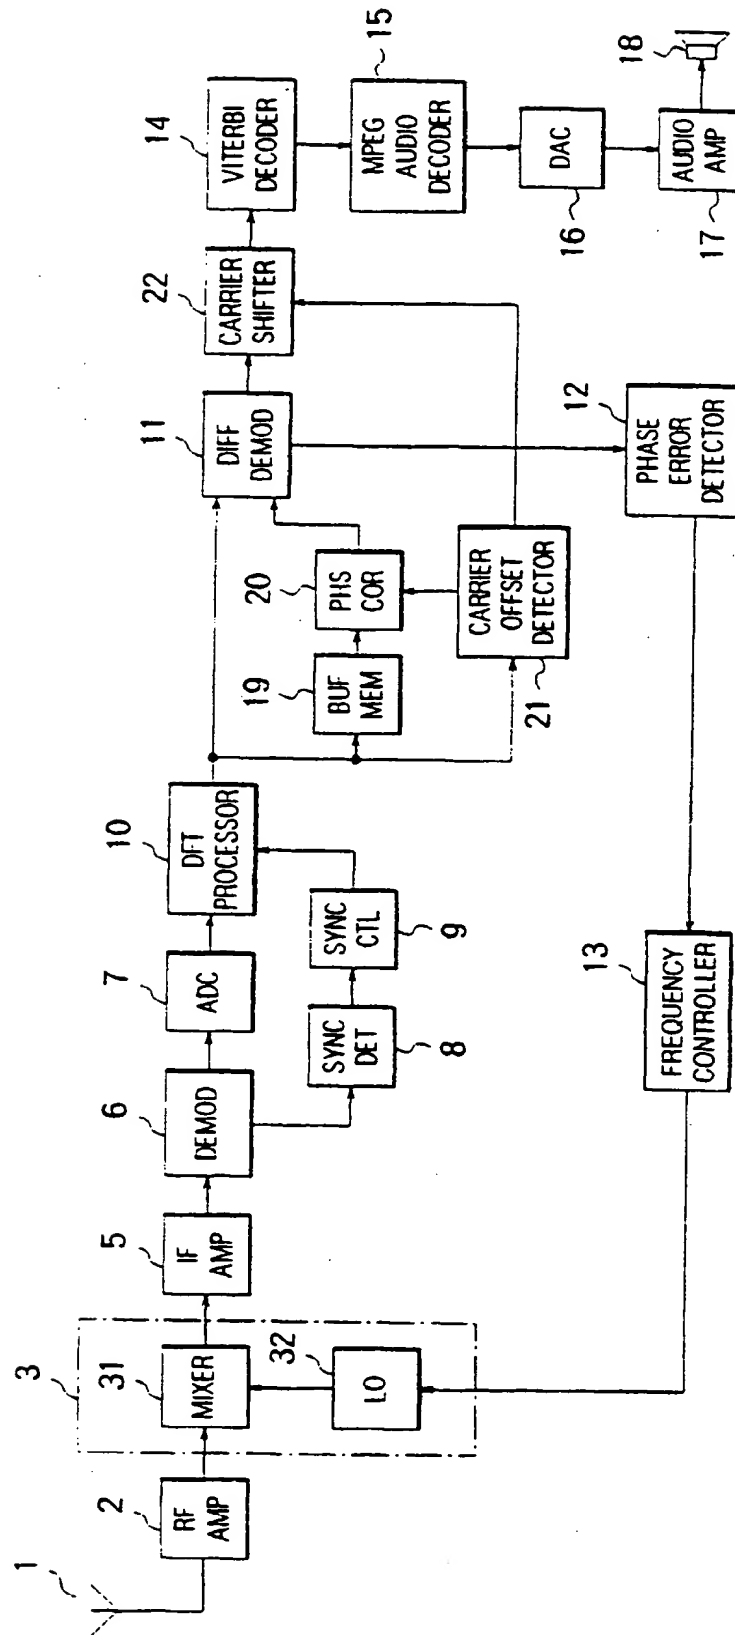


FIG. 5


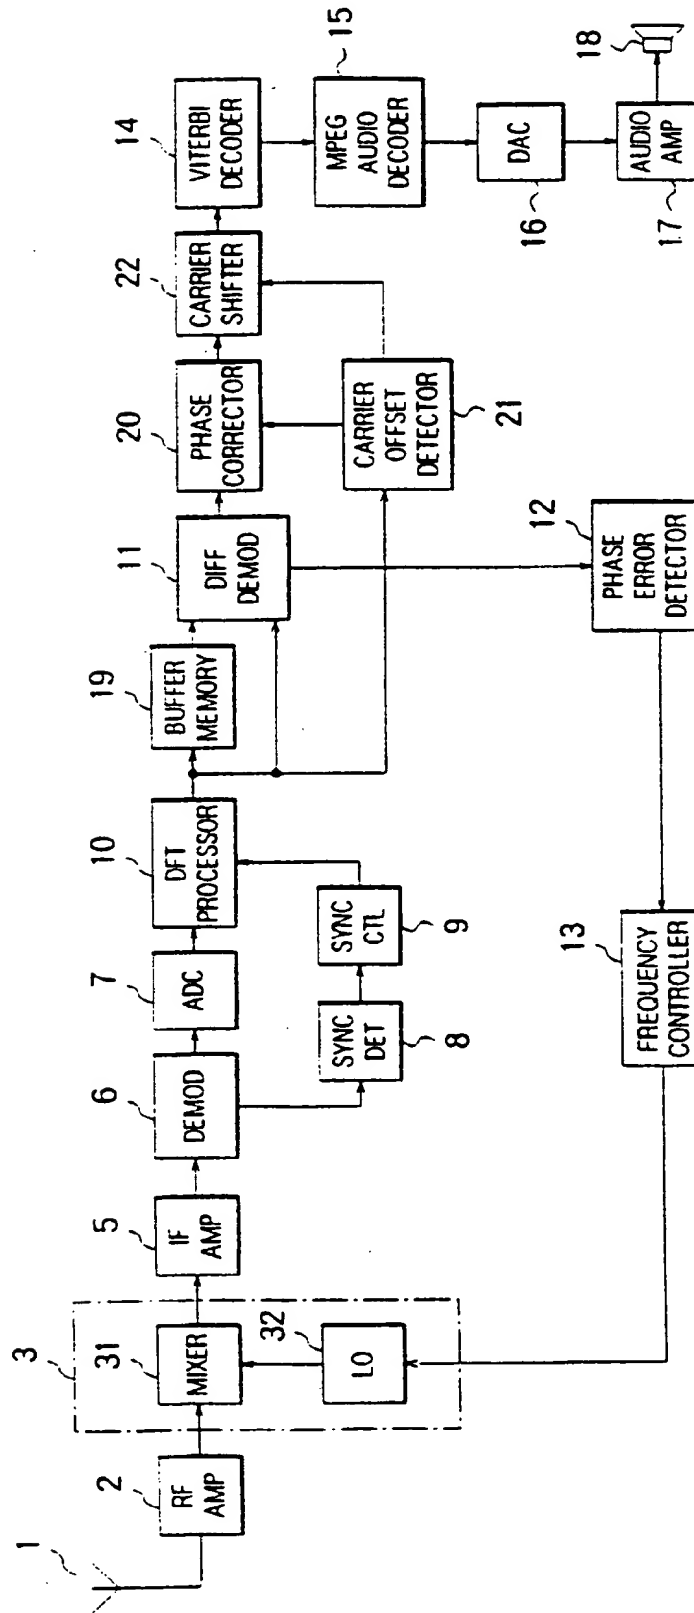


FIG. 6



(19)

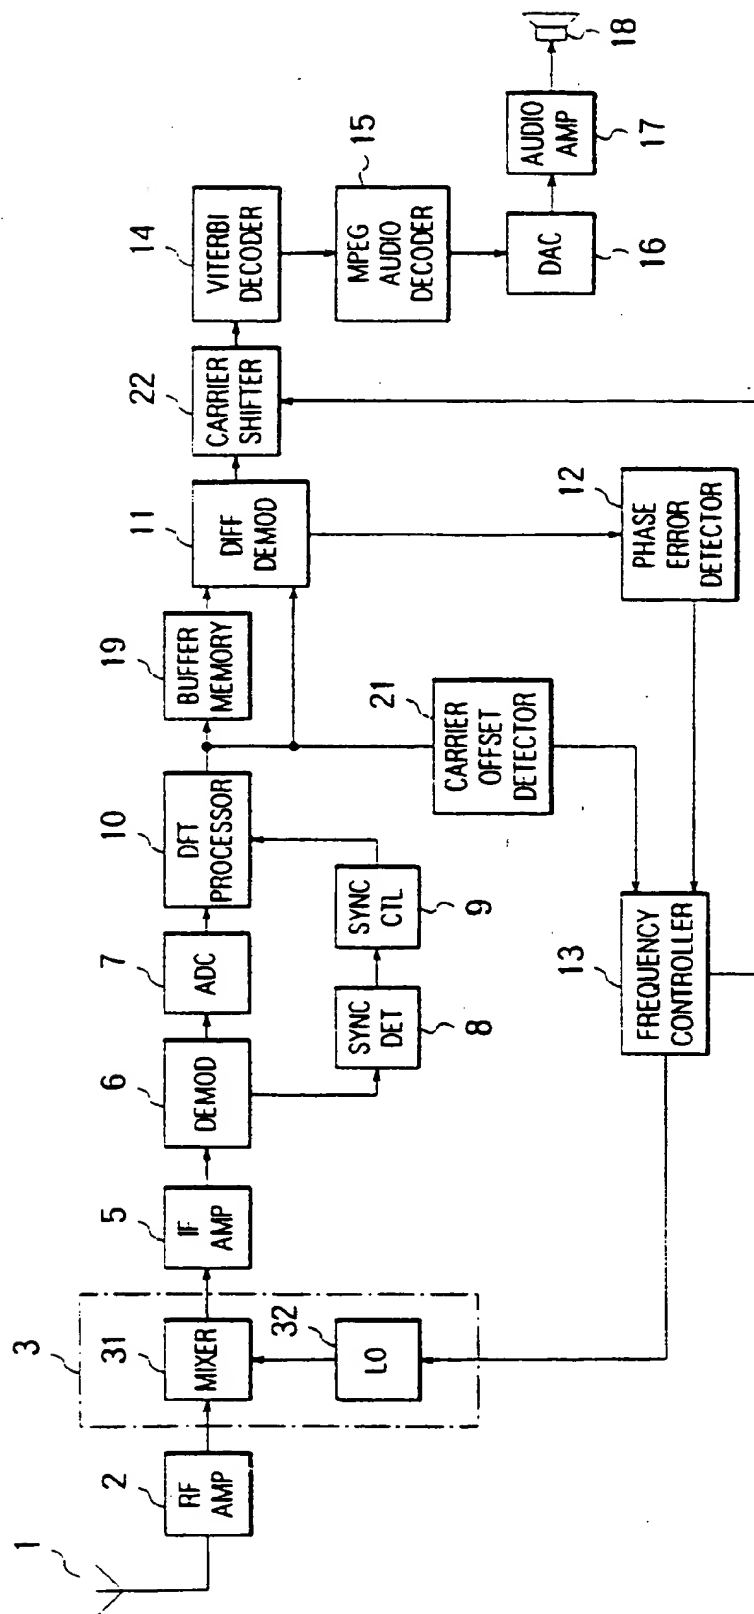

Europäisches Patentamt
European Patent Office
Office européen des brevets



(11)

EP 0 823 804 A3

(12)

EUROPEAN PATENT APPLICATION

(88) Date of publication A3:
17.05.2000 Bulletin 2000/20

(51) Int Cl.7: H04L 27/26

(43) Date of publication A2:
11.02.1998 Bulletin 1998/07

(21) Application number: 97305936.3

(22) Date of filing: 05.08.1997

(84) Designated Contracting States:
AT BE CH DE DK ES FI FR GB GR IE IT LI LU MC
NL PT SE

(30) Priority: 06.08.1996 JP 20738296

(71) Applicant: MITSUBISHI DENKI KABUSHIKI
KAISHA
Tokyo 100 (JP)

(72) Inventors:
• Tsujishita, Masahiro
Chiyoda-ku, Tokyo 100 (JP)

• Taura, Kenichi
Chiyoda-ku, Tokyo 100 (JP)
• Ohkubo, Tadatoshi
Chiyoda-ku, Tokyo 100 (JP)
• Ohsuga, Yoshiharu
Chiyoda-ku, Tokyo 100 (JP)


(74) Representative: Burke, Steven David et al
R.G.C. Jenkins & Co.
26 Caxton Street
London SW1H 0RJ (GB)

(54) Carrier offset correction in a multicarrier modulation system

(57) A received multicarrier DPSK signal is down-converted using a local oscillator, producing an array of phase values is obtained. The receiver detects the car-

rier offset, and applies the corresponding correction to the values in the array. As a result, the local oscillator need only be tuned to within a range equal to the spacing of the subcarriers.

FIG. 1

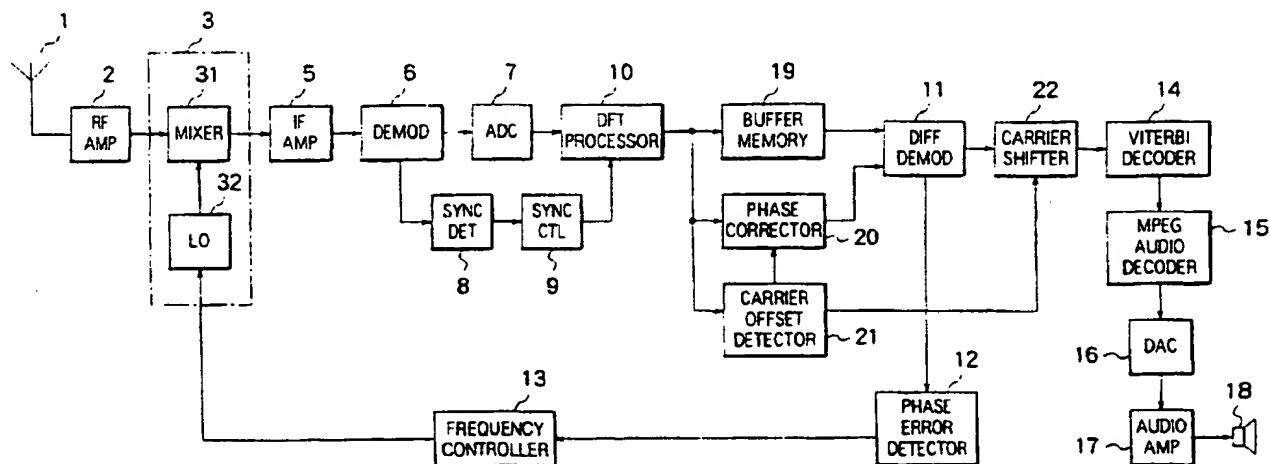

EP 0 823 804 A3



European Patent
Office

EUROPEAN SEARCH REPORT

Application Number
EP 97 30 5936

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (Int.Cl.6)
A	FR 2 721 778 A (FRANCE TELECOM ;TELEDIFFUSION FSE) 29 December 1995 (1995-12-29) * abstract * * page 6, line 21 - line 29 * * page 9, line 11 - page 10, line 18 * * figures 1-3 *	1-12	H04L27/26
A	EP 0 683 576 A (HITACHI LTD) 22 November 1995 (1995-11-22) * page 2, line 43 - page 3, line 8 * * page 11, line 55 - page 12, line 43 * * figures 4,6 *	1-12	
A	US 5 444 697 A (LEUNG CYBIL S ET AL) 22 August 1995 (1995-08-22) * abstract * * column 16, line 45 - line 64 * * claims 1-16 * * figures 9,14,16 *	1-12	
			TECHNICAL FIELDS SEARCHED (Int.Cl.6)
			H04L
The present search report has been drawn up for all claims			
Place of search THE HAGUE		Date of completion of the search 15 March 2000	Examiner Langinieux, F
CATEGORY OF CITED DOCUMENTS X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons & : member of the same patent family, corresponding document			

EP 97 30 5936 (1997-03-02) (P. 4/001)

**ANNEX TO THE EUROPEAN SEARCH REPORT
ON EUROPEAN PATENT APPLICATION NO.**

EP 97 30 5936

This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report.
The members are as contained in the European Patent Office EDP file on
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

15-03-2000

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
FR 2721778 A	29-12-1995	EP 0767996 A	16-04-1997
		WO 9600472 A	04-01-1996
EP 0683576 A	22-11-1995	JP 2989742 B	13-12-1999
		JP 7321763 A	08-12-1995
US 5444697 A	22-08-1995	AU 7454794 A	28-02-1995
		WO 9505042 A	16-02-1995

EPO FORM P3159

For more details about this annex see Official Journal of the European Patent Office, No. 12/82